



### Basic Voice Commands

**VisualSpection** – Return to the VisualSpection homepage

**Navigate Home** – Return to the hardware homepage

**Navigate Back** – Go back one page

**Select Item (#)** – Select fields by their assigned number

**Zoom Level (#)** – Zoom in for photos and videos (Levels 1–5)

**Page (Up/Down)** – Scroll up or down on a list

**Mute Microphone** – Mutes microphone. Press black action button to unmute.



Action button



### Phonetic Alphabet

A – Alpha

B – Bravo

C – Charlie

D – Delta

E – Echo

F – Foxtrot

G – Golf

H – Hotel

I – India

J – Juliette

K – Kilo

L – Lima

M – Mike

N – November

O – Oscar

P – Papa

Q – Quebec

R – Romeo

S – Sierra

T – Tango

U – Uniform

V – Victor

W – Whiskey



X – X-ray


Y – Yankee

Z – Zulu




### Connect Device to Wi-Fi


1. Say **My Programs**. 
2. Say **Settings**. 
3. Say **Network and Internet**.
4. Say **Wireless Networks**.
5. Say **On**.
6. Say the name of your wireless network and enter password.
7. Turn your head to select letters on the virtual keyboard.

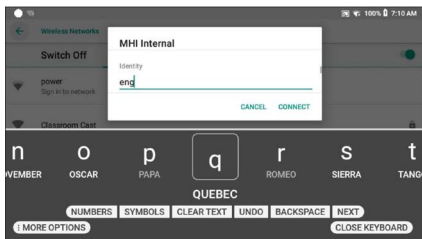

8. Say **Accept** or **Connect**.

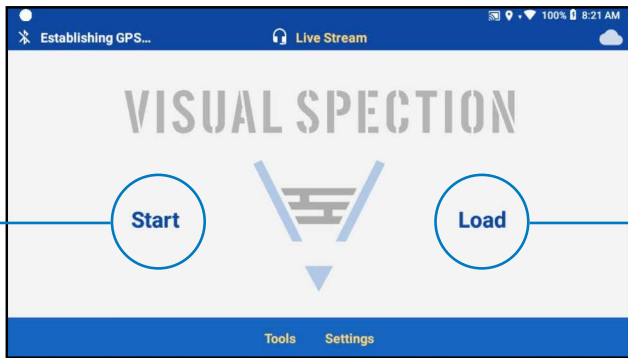

VisualSpection Homepage

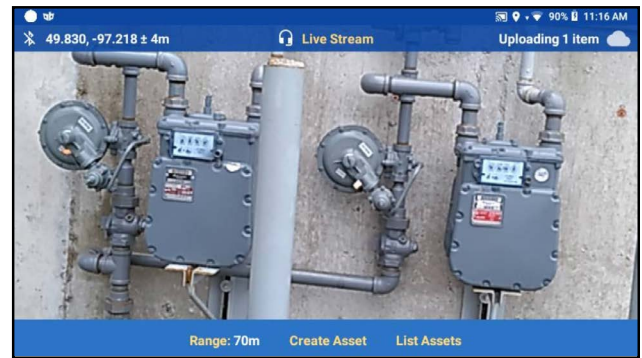

VisualSpection Default AR View



## Create New Asset Group

1. Say **VisualSpection**.
2. Say **Start** to start your new inspection.
  - a. You will enter the **Default AR View**.
3. Say **Create Asset** to mark location of asset.
  - a. Ensure you have GPS.
4. User can **Rename** or **Add media**.
5. Say **Navigate Back** to finish the asset.
6. You can now continue creating assets.
7. Say **Navigate Back** from **Default AR View** to finish.



## Load Asset Group

1. Say **VisualSpection**.
2. Say **Load → Continue**.
3. Say **Select (#)** and say:
  - a. **Sync** – *Must have Wi-Fi connection* – Loads the asset group to the headset. It can be accessed at all times, even without internet connection.
  - b. **Load Now** – Loads the asset group.
  - c. **No** – Load the asset group later.
4. Assets will appear as AR markers in **Default AR View**.
  - a. You can view all assets by saying **List Assets**.
5. Say **Select (#)** to select the asset you want to view.
6. Say **Perform Task** to complete your assigned tasks.
7. Say **Navigate Back** to return to **List View** or **Default AR View**.



## Live Stream

1. Say **Live Stream** to begin a live stream.
2. Say **Select (#)** to reach your on-call expert.
3. Say **VisualSpection** to end live-stream.



For technical assistance contact [VSsupport@mhi.com](mailto:VSsupport@mhi.com)

mhi.ca

Powered by Manitoba Hydro International Ltd.  
Available in accessible formats upon request.

